

Installation manual

Citroen / Peugeot / DS



I Navigation operation system

There are two solutions to switch the navigation system and original car radio system

- 1、 Long press 【LIST】 button on steering wheel for 2 seconds
- 2、 Long press the upside of screen for 2 seconds



长按此区域两秒钟
可以切换到导航系




长按此区域两秒钟
可以切换到收音机
系统

II Component of Video interface



Navigation unit

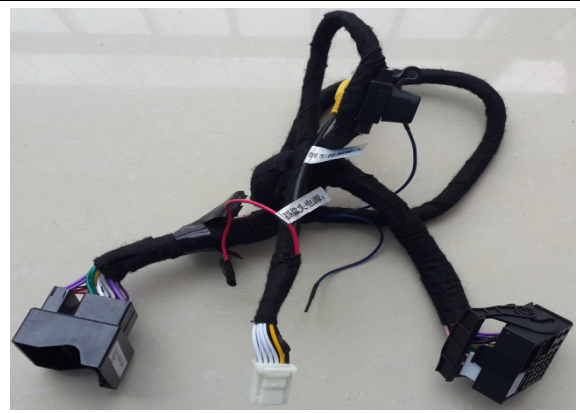

Power cable



LVDS cable



Velcro



GPS antenna

III Cable connection



- A:** connect with original car power cable
- B:** connect with connector of navigation unit
- C:** connect with connector of original car radio unit






- D:** connect with the black video connector of original radio unit
- E:** connect with the blue video connector of navigation unit




- F:** GPS antenna receiver. The place you install the GPS antenna have great influence on signal. We suggest you install this antenna on the car windscreen platform.
- G:** connect navigation unit with the connector of GPS antenna.

IV Installation of navigation head unit

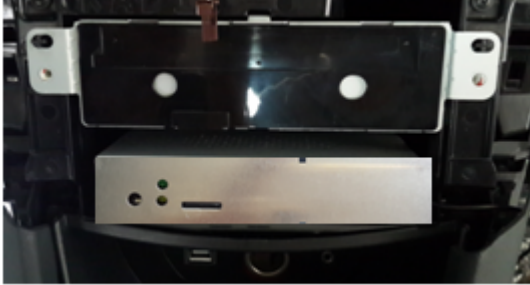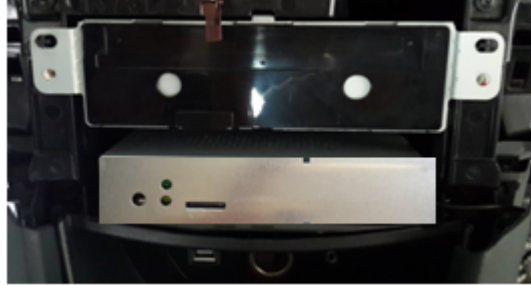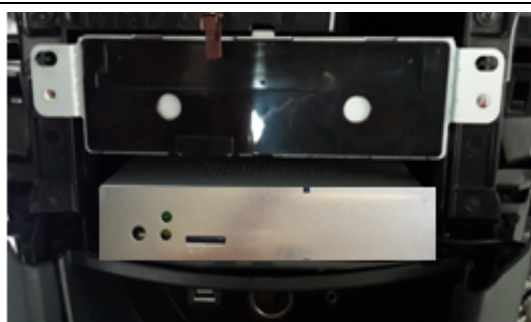 <p>Peugeot 408</p> <p>Paste the Velcro on the platform below the CD</p>	 <p>Citroen C4L</p> <p>Paste the Velcro on the platform below the CD</p>
 <p>DS5</p> <p>Paste the Velcro on the platform below the CD</p>	 <p>DS6</p> <p>Paste the Velcro on the platform below the CD</p>
 <p>Citroen C5</p> <p>Paste the Velcro on the platform at</p>	 <p>Peugeot 3008</p> <p>Paste the Velcro on the platform</p>


the backside of screen.

below the CD

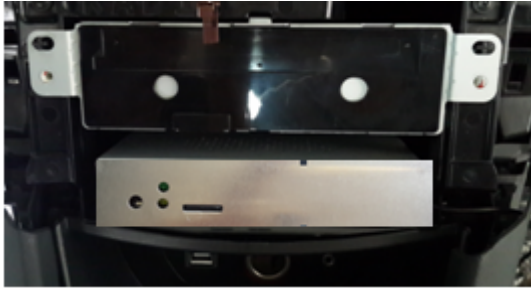

DS3

Paste the Velcro on the platform
below the CD

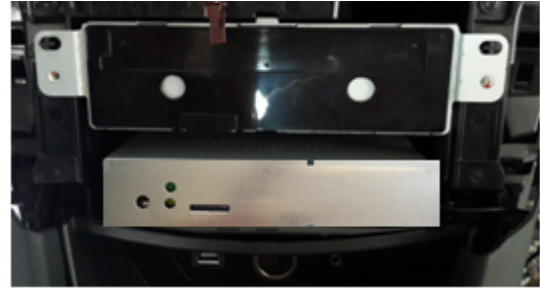

Peugeot 508

Paste the Velcro on the platform
below the CD



Citroen C3-XR

The head unit installed on the
backside of air conditioning control
board. Please use the electrician tape
to avoid the shake of head unit.



Peugeot 2008

The head unit installed on the
backside of air conditioning control
board. Please use the electrician
tape to avoid the shake of head
unit.